

*Robert Sorby*

**HollowPRO™**

**Hollowing Made Easy**

**STEP BY STEP USER GUIDE**

- Easy to set-up and use
- Fits a wide range of woodturning lathes
- High quality components for a smooth operation
- Suitable for all levels of woodturning
- Unique design gives perfect tool support



*Robert Sorby*

MADE IN SHEFFIELD, ENGLAND - SINCE 1828

# The Robert Sorby HollowPro™

*Robert Sorby*

# HollowPRO™

*Hollowing Made Easy*


The Robert Sorby HollowPro™ is a very easy to use jig that gives additional tool support when hollowing as well as many other woodturning operations.

The versatile HollowPro™ fits a wide range of woodturning lathes by utilising the stems from the Robert Sorby modular tool rest system.

The easy to adjust cantilever action of the clamping rollers, ensures the optimum control for a large selection of tool sizes.

The HollowPro™ system can be used with recommended Robert Sorby woodturning tools and most other woodturning tools.

## Features & Benefits

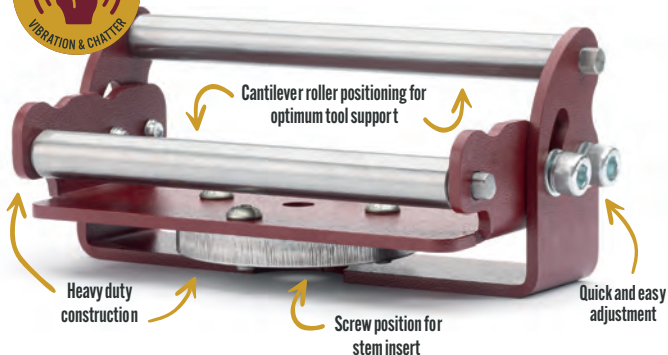

# WARNING

This product must be used with care and appropriate PPE worn during use.  
Please read before use.

# Step-by-Step Guide

## STEP 1



Turn the **HollowPro™** over to access the stem fitting location

## STEP 2



Screw the stem into the base of the **HollowPro™** and lock into position

# The Robert Sorby HollowPro™

## STEP 3



Insert the stem into the lathe banjo

## STEP 4



Place the desired tool onto the lower roller and adjust the height of the stem in the banjo, so the cutting edge of the tool is at the required position and lock the stem into place

# Step-by-Step Guide

## STEP 5



Slacken the cantilever locking screws and adjust the upper roller until it sits securely on the top of the tool shaft and lock into position

## STEP 6



The rollers allow the user to move the tool lightly from left and right whilst being held securely

# HollowPro™ - Top Tips

- Always ensure that all bolts and locking handles are locked into position before starting to use the HollowPro™
- Ensure the upper roller is sitting securely on the top of the tool without hindering the correct operation
- Maintain tool shaft contact with both rollers at all times during use

For more user information on the HollowPro™, please refer to our website  
[www.robert-sorby.co.uk](http://www.robert-sorby.co.uk)

## Hollowing and Internal Shaping



Robert Sorby tools recommended for hollowing and internal shaping in conjunction with the HollowPro™ are :-

- Sovereign Ultima SOV16S-ULTS & SOV22S-ULTM
- Swan Neck Hollowing Tools 855 & 859
- HollowMaster RS230KT & Midi HollowMaster RS130KT
- Multi-tipped Hollowing Tool RS200KT & Midi Multi-Tipped hollowing tool RS100KT
- Extra Long Multi-Tipped Hollowing Tool SOV-RS300
- Any of the TurnMaster Range
- Deep Hollowing Reverse Hooker Tool RS210
- Swivel Tip Probes 8801H & 8802H

# HollowPro™ - Top Tips

## External Shaping, Scraping and Finishing



Recommended Robert Sorby tools for external shaping, scraping and finishing to use with the HollowPro™ are :-

- Any of the TurnMaster Range
- Round Nose Scraper 820H
- Square End Scraper 823H
- Curved Scraper 828H
- Round/Side Scraper 824H
- Diamond/Side Scraper 825H
- Heavy Duty Scrapers 8004LH, 8007LH & 8008LH
- Extra Heavy Duty Scrapers 8012H, 8013H, 8014H & 8015H
- Box Hollower 803H
- Mushroom Tool 804H



# Robert Sorby

MADE IN SHEFFIELD, ENGLAND - SINCE 1828

The Robert Sorby HollowPro™ System comes with the world renowned Robert Sorby lifetime guarantee.



It is our policy to continuously improve products and hence we reserve the right to change designs and specifications without prior notice. E&OE



PROUDLY MADE IN SHEFFIELD, ENGLAND

FOLLOW US ON SOCIAL @ROBERTSORBY



Robert Sorby, Athol Road, Sheffield, S8 0PA England  
Tel: +44 (0)114 225 0700 Fax: +44 (0)114 225 0710 E-mail: sales@robert-sorby.co.uk

[www.robert-sorby.co.uk](http://www.robert-sorby.co.uk)

Registered in England: Company No 3464018.  
Registered Office: Atlas Way, Atlas North, Sheffield, S4 7QQ, England. VAT No. GB 172 4019 84. Patent pending.